

Alternative method for the calculation of stress-strain state parameters in normal sections of structural members

I. Židonis

Šiauliai University, Vilniaus str. 141, 76353 Šiauliai, Lithuania, E-mail: ipolitaz@splius.lt

1. Introduction

Analysis of stress-strain state in cross-sections of reinforced concrete members is often required for the design and investigation of structures. It is performed for different loading stages of reinforced concrete members: before cracking, in cracking stage, in the service stage of reinforced concrete members with cracks, for the failure stage of the member. For the calculation of parameters of these states, simple but very conventional and inaccurate stress diagrams are used: triangular, rectangular, rectangular-curved line (the curved line diagrams are not clearly defined).

Since there is no general method of the analysis and quite distorted calculation diagrams are employed the calculation has many defects [1].

Many of the problems may be solved using more realistic nonlinear stress-strain diagrams for materials [2-4]. Nonlinear diagrams are proposed in the regulations [5, 6]. In the latter years much attention is being paid to the generation and application of nonlinear diagrams [7-16]. The existing general methods for the calculation of stress-strain state parameters, with all their great possibilities, cannot replace simpler but more convenient models for the solution of specific problems. Unfortunately, there is no such general but convenient method for direct use of nonlinear stress-strain relationships without replacing them, for instance, by broken lines comprised of segments of a straight line [10] and that would take into account the possible deviations of the strains of the materials from the hypothesis (Bernoulli's) of the plane sections [11].

This paper develops the method published in [1], created for the calculation of stress-strain state parameters in normal sections. The new method presented in this paper is more general in comparison with the aforementioned one since it gives us a possibility to analyze layered structures. The method can be applied for analysis of concrete, reinforced concrete, timber, metal and other structural members in various loading stages. At present, it is very important to have a method enabling us to use curvilinear strain-stress relationships. In the case of concrete and reinforcement, the relationships of the Eurocode [5] are adopted in the regulation [6].

2. Definitions and symbols used in the paper

Structural member (hereafter - member) is flexural, eccentrically compressed or eccentrically tensioned bar made of concrete, reinforced concrete, metal, wood or other materials;

the main material of the member is material constituting the biggest part of the member into which materials of other parts are reduced for the analysis: in case of

concrete and reinforced concrete – concrete, in case of timber members – timber, etc.;

effective cross-section is the part of cross-sectional area of the member that is allowed for in the analysis and at the time considered is subject to the normal stress;

Z_c and Z_t are the zones of effective cross-sectional area of the member in compression and tension respectively; for the zone Z_c characteristics for materials in compression are applied, while for the zone Z_t – characteristics for these in tension;

member strengthening is strengthened parts of the members; e.g. stronger members imbedded in to concrete members or fixed to the timber member;

member weakening is ducts in the member, e.g. for the prestressed reinforcement, etc.;

cross-section layer is rectangular layer in the effective cross-section of the member, with dimensions and characteristics of materials typical to the layer;

first edge of the cross-section layer (marked by Index 1) is the edge with the lowest arithmetical value of acting stress*;

second edge of the cross-section layer (marked by Index 2) is the edge with the highest arithmetical value of acting stress*;

values of the parameters x_i , v_i , ω_i , ϖ_i of the first edge are marked by Index 1; while these of the second edge are marked by Index 2;

symbols i , j , k , n are used to mark the number of layer in the cross-section, the number of strengthening (weakening), the number of reinforcement;

symbol f is used to mark the parameter of strengthening (weakening), and symbol s is used to mark the parameter of reinforcement;

regular crack is a crack caused by the forces considered;

random crack is an irregular crack caused not by the forces considered;

$h_{cr,0}$ is random crack depth (see Fig. 1);

h_{cr} is regular crack depth;

h is depth of the member;

$0-0$ is neutral axis;

$w-w$ is axis parallel to the neutral axis; it is expedient to place it on the edge of the cross-section with the lowest arithmetical value of strain;

$a-a$ is any axis parallel to the axis $0-0$;

$u-u$ is any layers of the material of the member

* For the zone Z_c negative values are taken

$$\varphi = \frac{\varepsilon_w}{x_w} = \frac{\varepsilon_{0i}}{x_i} = \frac{\varepsilon_{0fi}}{x_{fi}} = \frac{\varepsilon_{0si}}{x_{si}} = \frac{\varepsilon_{0mi}}{x_{mi}} \quad (\text{see Fig. 1});$$

$$k_i = \frac{\varepsilon_i}{\varepsilon_{0i}}, \quad k_{mi} = \frac{\varepsilon_{mi}}{\varepsilon_{0mi}}, \quad k_{fi} = \frac{\varepsilon_{fi}}{\varepsilon_{0fi}}, \quad k_{si} = \frac{\varepsilon_{si}}{\varepsilon_{0si}}.$$

3. The essence of the method

The paper deals with the case of the analysis of structural members subjected to the action of bending moments and axial forces in the symmetry plane of cross-section of the members.

Conditions of static equilibrium in respect to the axis $a-a$ of forces and bending moments, acting the effective cross-section (see Fig. 1) give (for simplicity, instead of $\sum_{i=1}^n$ the symbol Σ is written)

$$\Sigma N_{xi} + \Sigma N_{fi} + \Sigma N_{si} + \Sigma N_i = 0 \quad (1)$$

$$\Sigma M_{axi} + \Sigma M_{afi} + \Sigma M_{asi} + \Sigma N_i e_{ai} + \Sigma M_i = 0 \quad (2)$$

The following easy-to-integrate relationship $\sigma_i - \varepsilon_i$ for the layers of the main material is selected

$$\sigma_i = \bar{E}_i \varepsilon_i = E_i \varepsilon_i \nu_i = \alpha_{ei} E k_i \varepsilon_{0i} \nu_i = \varphi E k_i \alpha_{ei} \nu_i x_i \quad (3)$$

where

$$\varepsilon_i = k_i \varepsilon_{0i} = k_i \varphi \cdot x_i;$$

$$\nu_i = 1 + c_{1i} \eta_i + c_{2i} \eta_i^2 + c_{3i} \eta_i^3 + c_{4i} \eta_i^4 + \dots \quad (4)$$

For instance, ν_i for the concrete in compression zone can be taken from [9].

The resultant force of stresses σ_i of the cross-section layer i , which is of b_i in width and of h_i in depth (see Fig. 1), is

$$c_{1i} = \left\{ 2(\eta_{ri} + 1)(1 - \eta_{ri})^3 + (\eta_{ri} - 1)\alpha_{eri} + [(5\eta_{ri} - 3)\alpha_{vi} + \eta_{ri}^3(3\eta_{ri} - 5)]\nu_{mi} \right\} / \left\{ \eta_{ri}(\eta_{ri} - 1)^3 \right\} \quad (11)$$

$$c_{2i} = \left\{ (\eta_{ri}^2 + 4\eta_{ri} + 1)(\eta_{ri} - 1)^3 + (1 + \eta_{ri} - 2\eta_{ri}^2)\alpha_{eri} + 2[(1 + \eta_{ri} - 5\eta_{ri}^2)\alpha_{vi} + \eta_{ri}^3(5 - \eta_{ri} - \eta_{ri}^2)]\nu_{mi} \right\} / \left\{ \eta_{ri}^2(\eta_{ri} - 1)^3 \right\} \quad (12)$$

$$c_{3i} = \left\{ 2(\eta_{ri} + 1)(1 - \eta_{ri})^3 + (\eta_{ri}^2 + \eta_{ri} - 2)\alpha_{eri} + [(5\eta_{ri}^2 + 5\eta_{ri} - 4)\alpha_{vi} + \eta_{ri}^2(4\eta_{ri}^2 - 5\eta_{ri} - 5)]\nu_{mi} \right\} / \left\{ \eta_{ri}^2(\eta_{ri} - 1)^3 \right\} \quad (13)$$

$$c_{4i} = \left\{ (\eta_{ri} - 1)^3 + (1 - \eta_{ri})\alpha_{eri} + 2[(1 - 2\eta_{ri})\alpha_{vi} + \eta_{ri}^2(2 - \eta_{ri})]\nu_{mi} \right\} / \left\{ \eta_{ri}^2(\eta_{ri} - 1)^3 \right\} \quad (14)$$

Eqs. (11-14) are described in papers [9, 15, 16].

Symbols in Eqs. (11-14) (Fig. 2):

$$E_{ci} = \tan \beta; \quad E_{ri} = \tan(-\gamma); \quad \alpha_{eri} = E_{ri} / E_{ci}; \quad \sigma_{cei} = E_{ci} \varepsilon_{ci};$$

$$\sigma_{celi} = E_{ci} \varepsilon_{cli}; \quad \sigma_{cli} = f_{cmi}; \quad \nu_{mi} = \nu_{cli} = \sigma_{cli} / \sigma_{celi};$$

$$\nu_{ri} = \sigma_{cri} / \sigma_{cei}; \quad \alpha_{vi} = \nu_{ri} / \nu_{cli} = \beta_{ri} / \eta_{ri};$$

$$\beta_{ri} = \sigma_{cri} / \sigma_{cli}; \quad \eta_{ri} = \varepsilon_{cri} / \varepsilon_{cli}.$$

$$N_{xi} = \int_{\bar{x}_{i1}}^{\bar{x}_{i2}} \sigma_i b_i dx_i = \int_{\bar{x}_{i1}}^{\bar{x}_{i2}} \varphi E k_i \alpha_{ei} b_i \nu_i x_i dx_i =$$

$$= \varphi E k_i \alpha_{ei} b_i (\omega_{i2} \bar{x}_{i2}^2 - \omega_{i1} \bar{x}_{i1}^2) \quad (5)$$

Here and hereafter the dash over x (\bar{x}) indicates that the effective part of the cross-section layer is taken, i.e. the part subjected to the action of stress σ_i ; numbers $i1$ and $i2$ denote edges of the effective part of member layer i : 1 – the edge subjected mathematically to the lowest σ_i , and 2 – the edge subjected mathematically to the highest σ_i .

Moment of force N_{xi} with respect to the neutral axis 0-0 can be expressed by the formula

$$M_{xi} = \int_{\bar{x}_{i1}}^{\bar{x}_{i2}} \sigma_i b_i x_i dx_i = \int_{\bar{x}_{i1}}^{\bar{x}_{i2}} \varphi E k_i \alpha_{ei} b_i \nu_i x_i^2 dx_i =$$

$$= \varphi E k_i \alpha_{ei} b_i (\varpi_{i2} \bar{x}_{i2}^3 - \varpi_{i1} \bar{x}_{i1}^3) \quad (6)$$

Eccentricity of force N_{xi} with respect to the neutral axis 0-0 is as follows

$$e_{xi} = \frac{M_{xi}}{N_{xi}} = \frac{\varpi_{i2} \bar{x}_{i2}^3 - \varpi_{i1} \bar{x}_{i1}^3}{\omega_{i2} \bar{x}_{i2}^2 - \omega_{i1} \bar{x}_{i1}^2} \quad (7)$$

here

$$\omega_i = \frac{1}{2} + \frac{c_{1i}}{3} \eta_i + \frac{c_{2i}}{4} \eta_i^2 + \frac{c_{3i}}{5} \eta_i^3 + \frac{c_{4i}}{6} \eta_i^4 + \dots \quad (8)$$

$$\varpi_i = \frac{1}{3} + \frac{c_{1i}}{4} \eta_i + \frac{c_{2i}}{5} \eta_i^2 + \frac{c_{3i}}{6} \eta_i^3 + \frac{c_{4i}}{7} \eta_i^4 + \dots \quad (9)$$

$$\eta_i = \frac{\varepsilon_i}{\varepsilon_{mi}} = \frac{k_i \varepsilon_{0i}}{k_{mi} \varepsilon_{0mi}} = k_{ki} \frac{\bar{x}_i}{x_{mi}} \cong \frac{\bar{x}_i}{x_{mi}} \quad (10)$$

Values of coefficients c_i for the concrete in compression zone Z_c may be taken either from [9, 15, 16,]

It is assumed that within the limits of layer i

$$k_i = \frac{\varepsilon_i}{\varepsilon_{0i}} = \frac{\varepsilon_{i1} + \varepsilon_{i2}}{\varepsilon_{0i1} + \varepsilon_{0i2}} = \text{const} \quad \text{and} \quad k_{ki} = \frac{k_i}{k_{mi}} \approx 1.$$

For the analysis when $\eta_i = \eta_{i1}$, $\omega_i = \omega_{i1}$ and $\varpi_i = \varpi_{i1}$, it is assumed that $\bar{x}_i = \bar{x}_{i1}$; for the analysis when

$$\begin{aligned}
&= \varphi E \left[\frac{v_{Si}}{v_{pi}} \frac{P_i}{E} \frac{x_w}{\varepsilon_w} + k_{si} \alpha_{esi} A_{si} v_{Si} (a_{siu} + x_w) \right] = \varphi E \left(\frac{v_{Si}}{v_{pi}} \frac{P_i}{E} \frac{1}{\frac{\varepsilon_\varepsilon x_w / k_\varepsilon}{a_\varepsilon + x_w}} x_w + k_{si} \alpha_{esi} A_{si} v_{Si} a_{siu} + k_{si} \alpha_{esi} A_{si} v_{Si} x_w \right) = \\
&= \varphi E \left[\left(k_{si} \alpha_{esi} A_{si} v_{Si} + \frac{P_i v_{Si} / v_{pi}}{E \varepsilon_\varepsilon / k_\varepsilon} \right) x_w + k_{si} \alpha_{esi} A_{si} v_{Si} a_{siu} + \frac{P_i v_{Si} / v_{pi}}{E \varepsilon_\varepsilon / k_\varepsilon} a_\varepsilon \right] \quad (23)
\end{aligned}$$

Moment of the force N_{Si} around the axis $a - a$

$$\begin{aligned}
M_{aSi} &= N_{Si} (a_a - a_{siu}) = \varphi E \left[\left(k_{si} \alpha_{esi} A_{si} v_{Si} + \frac{P_i v_{Si} / v_{pi}}{E \varepsilon_\varepsilon / k_\varepsilon} \right) x_w + k_{si} \alpha_{esi} A_{si} v_{Si} a_{siu} + \frac{P_i v_{Si} / v_{pi}}{E \varepsilon_\varepsilon / k_\varepsilon} a_\varepsilon \right] (a_a - a_{siu}) = \\
&= \varphi E \left(k_{si} \alpha_{esi} A_{si} v_{Si} x_w + \frac{P_i v_{Si} / v_{pi}}{E \varepsilon_\varepsilon / k_\varepsilon} x_w + k_{si} \alpha_{esi} A_{si} v_{Si} a_{siu} + \frac{P_i v_{Si} / v_{pi}}{E \varepsilon_\varepsilon / k_\varepsilon} a_\varepsilon \right) (a_a - a_{siu}) = \\
&= \varphi E \left[k_{si} \alpha_{esi} A_{si} v_{Si} (a_{siu} + x_w) + \frac{P_i v_{Si} / v_{pi}}{E \varepsilon_\varepsilon / k_\varepsilon} (a_\varepsilon + x_w) \right] (a_a - a_{siu}) \quad (24)
\end{aligned}$$

When $x_{cu} \leq x_{si}$, or $a_{min} \leq a_{si}$, then $\bar{x}_{si} = x_{si}$ and $a_{Si} = N_{Si} = M_{aSi} = 0$. when $x_{cu} > x_{si}$ or $a_{min} > a_{si}$, then $a_{siu} = a_{si}$; $x_{si} = a_{siu} + x_w$;

$$N_i = \varphi E \frac{N_i}{\varphi E} = \varphi E \frac{N_i}{E \varepsilon_w} x_w = \varphi E \frac{N_i}{E \frac{\varepsilon_\varepsilon x_w / k_\varepsilon}{a_\varepsilon + x_w}} x_w = \varphi E \frac{N_i}{E \varepsilon_\varepsilon / k_\varepsilon} (a_\varepsilon + x_w) = \varphi E \left(\frac{N_i}{E \varepsilon_\varepsilon / k_\varepsilon} x_w + \frac{N_i}{E \varepsilon_\varepsilon / k_\varepsilon} a_\varepsilon \right) \quad (25)$$

$$M_i = \varphi E \frac{M_i}{\varphi E} = \varphi E \frac{M_i}{E \varepsilon_w} x_w = \varphi E \frac{M_i}{E \frac{\varepsilon_\varepsilon x_w / k_\varepsilon}{a_\varepsilon + x_w}} x_w = \varphi E \frac{M_i}{E \varepsilon_\varepsilon / k_\varepsilon} (a_\varepsilon + x_w) = \varphi E \left(\frac{M_i}{E \varepsilon_\varepsilon / k_\varepsilon} x_w + \frac{M_i}{E \varepsilon_\varepsilon / k_\varepsilon} a_\varepsilon \right) \quad (26)$$

$$\begin{aligned}
\Sigma M_i + \Sigma N_i e_{ai} &= \Sigma M_i + \Sigma N_i (a_a - e_i) = \Sigma \varphi E \frac{M_i}{E \varepsilon_\varepsilon / k_\varepsilon} (a_\varepsilon + x_w) + \Sigma \varphi E \frac{N_i}{E \varepsilon_\varepsilon / k_\varepsilon} (a_\varepsilon + x_w) (a_a - e_i) = \\
&= \varphi E \left[\frac{\Sigma M_i}{E \varepsilon_\varepsilon / k_\varepsilon} (a_\varepsilon + x_w) + \frac{\Sigma N_i}{E \varepsilon_\varepsilon / k_\varepsilon} (a_a - e_i) (a_\varepsilon + x_w) \right] = \varphi E \frac{\Sigma M_i + \Sigma N_i (a_a - e_i)}{E \varepsilon_\varepsilon / k_\varepsilon} (a_\varepsilon + x_w) = \\
&= \varphi E \left[\frac{\Sigma M_i}{E \varepsilon_\varepsilon / k_\varepsilon} x_w + \frac{\Sigma N_i}{E \varepsilon_\varepsilon / k_\varepsilon} (a_a - e_i) x_w + \frac{\Sigma M_i}{E \varepsilon_\varepsilon / k_\varepsilon} a_\varepsilon + \frac{\Sigma N_i}{E \varepsilon_\varepsilon / k_\varepsilon} (a_a - e_i) a_\varepsilon \right] = \\
&= \varphi E \left[\frac{\Sigma M_i + \Sigma N_i (a_a - e_i)}{E \varepsilon_\varepsilon / k_\varepsilon} x_w + \frac{\Sigma M_i + \Sigma N_i (a_a - e_i)}{E \varepsilon_\varepsilon / k_\varepsilon} a_\varepsilon \right] \quad (27)
\end{aligned}$$

After inserting the respective values in Eq. (1) the following conditions of static equilibrium are arrived at

$$\Sigma \varphi E k_i \alpha_{ei} b_i (\omega_{i2} \bar{x}_{i2}^2 - \omega_{i1} \bar{x}_{i1}^2) + \Sigma \varphi E k_{fi} \alpha_{efi} A_{fi} v_{fi} \bar{x}_{fi} + \Sigma \varphi E \left(\frac{v_{Si}}{v_{pi}} \frac{P_i}{\varphi E} + k_{si} \alpha_{esi} A_{si} v_{Si} \bar{x}_{si} \right) + \Sigma \varphi E \frac{N_i}{\varphi E} = 0 \quad (28)$$

$$\begin{aligned}
&\Sigma k_i \alpha_{ei} b_i (\omega_{i2} - \omega_{i1}) x_w^2 + \left[2 \Sigma k_i \alpha_{ei} b_i (\omega_{i2} d_{iu} - \omega_{i1} a_{iu}) + \Sigma k_{fi} \alpha_{efi} A_{fi} v_{fi} + \Sigma k_{si} \alpha_{esi} A_{si} v_{Si} + \frac{\Sigma (P_i v_{Si} / v_{pi}) + \Sigma N_i}{E \varepsilon_\varepsilon / k_\varepsilon} \right] x_w + \\
&+ \Sigma k_i \alpha_{ei} b_i (\omega_{i2} d_{iu}^2 - \omega_{i1} a_{iu}^2) + \Sigma k_{fi} \alpha_{efi} A_{fi} v_{fi} a_{fiu} + \Sigma k_{si} \alpha_{esi} A_{si} v_{Si} a_{siu} + \frac{\Sigma (P_i v_{Si} / v_{pi}) + \Sigma N_i}{E \varepsilon_\varepsilon / k_\varepsilon} a_\varepsilon = 0 \quad (29)
\end{aligned}$$

When $a_\varepsilon = 0$ and $\varepsilon_\varepsilon / k_\varepsilon = \varepsilon_w$, then the plane equation is

$$\Sigma k_i \alpha_{ei} b_i (\omega_{i2} - \omega_{i1}) x_w^2 + \left[2 \Sigma k_i \alpha_{ei} b_i (\omega_{i2} d_{iu} - \omega_{i1} a_{iu}) + \Sigma k_{fi} \alpha_{efi} A_{fi} v_{fi} + \Sigma k_{si} \alpha_{esi} A_{si} v_{Si} + \frac{\Sigma (P_i v_{Si} / v_{pi}) + \Sigma N_i}{E \varepsilon_w} \right] x_w +$$

$$+ \Sigma k_i \alpha_{ei} b_i (\omega_{i2} d_{iu}^2 - \omega_{i1} a_{iu}^2) + \Sigma k_{fi} \alpha_{efi} A_{fi} v_{fi} a_{fuu} + \Sigma k_{si} \alpha_{esi} A_{si} v_{si} a_{siu} = 0 \quad (30)$$

After inserting the respective values in to Eq. (2) the following conditions of static equilibrium are arrived at

$$\begin{aligned} & \Sigma k_i \alpha_{ei} b_i [(\omega_{i2} \bar{x}_{i2}^2 - \omega_{i1} \bar{x}_{i1}^2)(a_a + x_w) - (\omega_{i2} \bar{x}_{i2}^3 - \omega_{i1} \bar{x}_{i1}^3)] + \Sigma (k_{fi} \alpha_{efi} A_{fi} v_{fi} x_w + k_{fi} \alpha_{efi} A_{fi} v_{fi} a_{fuu})(a_a - a_{fuu}) + \\ & + \Sigma \left\{ \left[k_{si} \alpha_{esi} A_{si} v_{si} + \frac{P_i v_{si} / v_{pi}}{E \varepsilon_\varepsilon / k_\varepsilon} \right] x_w + k_{si} \alpha_{esi} A_{si} v_{si} a_{siu} + \frac{P_i v_{si} / v_{pi}}{E \varepsilon_\varepsilon / k_\varepsilon} a_\varepsilon \right\} (a_a - a_{siu}) + \\ & + \frac{\Sigma M_i + \Sigma N_i (a_a - e_i)}{E \varepsilon_\varepsilon / k_\varepsilon} x_w + \frac{\Sigma M_i + \Sigma N_i (a_a - e_i)}{E \varepsilon_\varepsilon / k_\varepsilon} a_\varepsilon = 0 \end{aligned} \quad (31)$$

$$\begin{aligned} & \Sigma k_i \alpha_{ei} b_i [(\omega_{i2} - \omega_{i1}) - (\omega_{i2} - \omega_{i1})] x_w^3 + \Sigma k_i \alpha_{ei} b_i [(\omega_{i2} - \omega_{i1}) a_a + 2(\omega_{i2} d_{iu} - \omega_{i1} a_{iu}) - 3(\omega_{i2} d_{iu} - \omega_{i1} a_{iu})] x_w^2 + \\ & + \left\{ \Sigma k_i \alpha_{ei} b_i [2(\omega_{i2} d_{iu} - \omega_{i1} a_{iu}) a_a + (\omega_{i2} d_{iu}^2 - \omega_{i1} a_{iu}^2) - 3(\omega_{i2} d_{iu}^2 - \omega_{i1} a_{iu}^2)] + \right. \\ & + \left. \Sigma k_{fi} \alpha_{efi} A_{fi} v_{fi} (a_a - a_{fuu}) + \Sigma k_{si} \alpha_{esi} A_{si} v_{si} (a_a - a_{siu}) + \frac{\Sigma (P_i v_{si} / v_{pi}) (a_a - a_{siu}) + \Sigma N_i (a_a - e_i) + \Sigma M_i}{E \varepsilon_\varepsilon / k_\varepsilon} \right\} x_w + \\ & + \Sigma k_i \alpha_{ei} b_i [(\omega_{i2} d_{iu}^2 - \omega_{i1} a_{iu}^2) a_a - (\omega_{i2} d_{iu}^3 - \omega_{i1} a_{iu}^3)] + \Sigma k_{fi} \alpha_{efi} A_{fi} v_{fi} a_{fuu} (a_a - a_{fuu}) + \\ & + \Sigma k_{si} \alpha_{esi} A_{si} v_{si} a_{siu} (a_a - a_{siu}) + \frac{\Sigma (P_i v_{si} / v_{pi}) (a_a - a_{siu}) + \Sigma N_i (a_a - e_i) + \Sigma M_i}{E \varepsilon_\varepsilon / k_\varepsilon} a_\varepsilon = 0 \end{aligned} \quad (32)$$

When $a_a = -x_w$, then moment of forces in respect to the neutral axis 0-0

$$\begin{aligned} & \Sigma k_i \alpha_{ei} b_i (\omega_{i2} - \omega_{i1}) x_w^3 + \left[3 \Sigma k_i \alpha_{ei} b_i (\omega_{i2} d_{iu} - \omega_{i1} a_{iu}) + \Sigma k_{fi} \alpha_{efi} A_{fi} v_{fi} + \Sigma k_{si} \alpha_{esi} A_{si} v_{si} + \frac{\Sigma (P_i v_{si} / v_{pi}) + \Sigma N_i}{E \varepsilon_\varepsilon / k_\varepsilon} \right] x_w^2 + \\ & + \left[3 \Sigma k_i \alpha_{ei} b_i (\omega_{i2} d_{iu}^2 - \omega_{i1} a_{iu}^2) + 2 \Sigma k_{fi} \alpha_{efi} A_{fi} v_{fi} a_{fuu} + 2 \Sigma k_{si} \alpha_{esi} A_{si} v_{si} a_{siu} + \frac{\Sigma (P_i v_{si} / v_{pi}) (a_{siu} + a_\varepsilon) + \Sigma N_i (e_i + a_\varepsilon) - \Sigma M_i}{E \varepsilon_\varepsilon / k_\varepsilon} \right] x_w + \\ & + \Sigma k_i \alpha_{ei} b_i (\omega_{i2} d_{iu}^3 - \omega_{i1} a_{iu}^3) + \Sigma k_{fi} \alpha_{efi} A_{fi} v_{fi} a_{fuu}^2 + \Sigma k_{si} \alpha_{esi} A_{si} v_{si} a_{siu}^2 + \frac{\Sigma (P_i v_{si} / v_{pi}) a_{siu} + \Sigma N_i e_i - \Sigma M_i}{E \varepsilon_\varepsilon / k_\varepsilon} a_\varepsilon = 0 \end{aligned} \quad (33)$$

When $a_a = 0$, then moment of forces in respect to the axis $w-w$

$$\begin{aligned} & \Sigma k_i \alpha_{ei} b_i [(\omega_{i2} - \omega_{i1}) - (\omega_{i2} - \omega_{i1})] x_w^3 + \Sigma k_i \alpha_{ei} b_i [3(\omega_{i2} d_{iu} - \omega_{i1} a_{iu}) - 2(\omega_{i2} d_{iu} - \omega_{i1} a_{iu})] x_w^2 + \\ & + \left\{ \Sigma k_i \alpha_{ei} b_i [3(\omega_{i2} d_{iu}^2 - \omega_{i1} a_{iu}^2) - (\omega_{i2} d_{iu}^2 - \omega_{i1} a_{iu}^2)] + \Sigma k_{fi} \alpha_{efi} A_{fi} v_{fi} a_{fuu} + \Sigma k_{si} \alpha_{esi} A_{si} v_{si} a_{siu} + \frac{\Sigma (P_i v_{si} / v_{pi}) a_{siu} + \Sigma N_i e_i - \Sigma M_i}{E \varepsilon_\varepsilon / k_\varepsilon} \right\} x_w + \\ & + \Sigma k_i \alpha_{ei} b_i (\omega_{i2} d_{iu}^3 - \omega_{i1} a_{iu}^3) + \Sigma k_{fi} \alpha_{efi} A_{fi} v_{fi} a_{fuu}^2 + \Sigma k_{si} \alpha_{esi} A_{si} v_{si} a_{siu}^2 + \frac{\Sigma (P_i v_{si} / v_{pi}) a_{siu} + \Sigma N_i e_i - \Sigma M_i}{E \varepsilon_\varepsilon / k_\varepsilon} a_\varepsilon = 0 \end{aligned} \quad (34)$$

When $a_a = 0$ and $a_\varepsilon = 0$ and $\varepsilon_\varepsilon / k_\varepsilon = \varepsilon_w$, then moment of forces in respect to the axis $w-w$

$$\begin{aligned} & \Sigma k_i \alpha_{ei} b_i [(\omega_{i2} - \omega_{i1}) - (\omega_{i2} - \omega_{i1})] x_w^3 + \Sigma k_i \alpha_{ei} b_i [3(\omega_{i2} d_{iu} - \omega_{i1} a_{iu}) - 2(\omega_{i2} d_{iu} - \omega_{i1} a_{iu})] x_w^2 + \\ & + \left\{ \Sigma k_i \alpha_{ei} b_i [3(\omega_{i2} d_{iu}^2 - \omega_{i1} a_{iu}^2) - (\omega_{i2} d_{iu}^2 - \omega_{i1} a_{iu}^2)] + \Sigma k_{fi} \alpha_{efi} A_{fi} v_{fi} a_{fuu} + \Sigma k_{si} \alpha_{esi} A_{si} v_{si} a_{siu} + \frac{\Sigma (P_i v_{si} / v_{pi}) a_{siu} + \Sigma N_i e_i - \Sigma M_i}{E \varepsilon_w} \right\} x_w + \\ & + \Sigma k_i \alpha_{ei} b_i (\omega_{i2} d_{iu}^3 - \omega_{i1} a_{iu}^3) + \Sigma k_{fi} \alpha_{efi} A_{fi} v_{fi} a_{fuu}^2 + \Sigma k_{si} \alpha_{esi} A_{si} v_{si} a_{siu}^2 = 0 \end{aligned} \quad (35)$$

For example, when in the equations of static equilibrium strains of the compressed edge are assumed, then in Eqs. (22)-(27) and (29) and in Eqs. (31)-(34) $a_\varepsilon = 0$ and $\varepsilon_\varepsilon / k_\varepsilon = \varepsilon_c / k_c = \varepsilon_w$; and when the equations of static equilibrium correspond to the strains of the member reinforcement group i then in Eqs. (22)-(27) and (29) and in Eqs. (31)-(34) $a_\varepsilon = a_{si}$ and $\varepsilon_\varepsilon / k_\varepsilon = \varepsilon_{si} / k_{si}$, etc.

4. Case of singly reinforced (nonprestressed) beam of rectangular cross-section

The case when $N_i = P_i = A_{fi} = 0$, $b_i = b$, $n = 1$, $a_{iu} = 0$, $d_{iu} = h$, $i = 1$ (further on this unity is omitted) and the strains of the concrete in tension and the compression zones of the beam do not exceed the limiting values of

strains, i.e. $\varepsilon_{cu} < \varepsilon_c < \varepsilon_{ctu}$ (Fig. 3) is presented

$$(k_2\omega_2 - k_1\omega_1)bx_w^2 + (2k_2\omega_2bh + k_s\alpha_{es}A_s\nu_s)x_w + k_2\omega_2bh^2 + k_s\alpha_{es}A_s\nu_s a_s = 0 \quad (36)$$

when $a_a = a_s$, $a_\varepsilon = a_s$ and $\varepsilon_\varepsilon/k_\varepsilon = \varepsilon_s/k_s$, then

$$\begin{aligned} & [k_2(\omega_2 - \varpi_2) - k_1(\omega_1 - \varpi_1)]x_w^3 + \\ & + [(k_2\omega_2 - k_1\omega_1)a_s + k_2(2\omega_2 - 3\varpi_2)h]x_w^2 + \\ & + \left\{ k_2[2\omega_2 a_s + (\omega_2 - 3\varpi_2)h]h + \frac{M}{bE\varepsilon_s/k_s} \right\} x_w + \\ & + k_2(\omega_2 a_s - \varpi_2 h)h^2 + \frac{Ma_s}{bE\varepsilon_s/k_s} = 0 \end{aligned} \quad (37)$$

when $a_a = a_s$, $a_\varepsilon = 0$ and $\varepsilon_\varepsilon/k_\varepsilon = \varepsilon_w$, then

$$\begin{aligned} & k_2[(\omega_2 - \varpi_2) - k_1(\omega_1 - \varpi_1)]x_w^3 + \\ & + [(k_2\omega_2 - k_1\omega_1)a_s + k_2(2\omega_2 - 3\varpi_2)h]x_w^2 + \\ & + \left\{ k_2[2\omega_2 a_s + (\omega_2 - 3\varpi_2)h]h + \frac{M}{bE\varepsilon_w} \right\} x_w + \\ & + k_2(\omega_2 a_s - \varpi_2 h)h^2 = 0 \end{aligned} \quad (38)$$

When the stresses of concrete in the tension zone are ignored (Fig. 3), in Eqs. (36)-(38) $\omega_2 = \varpi_2 = 0$

$$k_1\omega_1 bx_w^2 - k_s\alpha_{es}A_s\nu_s x_w - k_s\alpha_{es}A_s\nu_s a_{su} = 0 \quad (39)$$

$$k_1(\omega_1 - \varpi_1)x_w^3 + k_1\omega_1 a_s x_w^2 -$$

$$-\frac{M}{bE\varepsilon_s/k_s}x_w - \frac{Ma_s}{bE\varepsilon_s/k_s} = 0 \quad (40)$$

$$k_1(\omega_1 - \varpi_1)x_w^2 + k_1\omega_1 a_s x_w - \frac{M}{bE\varepsilon_w} = 0 \quad (41)$$

In Eqs. (37), (38), (40) and (41) the moments of forces were taken in respect to the axis $s-s$.

When the member is not reinforced, from Eq. (36) we get

$$(k_2\omega_2 - k_1\omega_1)x_w^2 + 2k_2\omega_2 hx_w + k_2\omega_2 h^2 = 0 \quad (42)$$

and from Eq. (33) we get

$$\begin{aligned} & (k_2\varpi_2 - k_1\varpi_1)x_w^3 + 3k_2\varpi_2 hx_w^2 + \\ & + \left(3k_2\varpi_2 h^2 - \frac{M}{bE\varepsilon_1/k_1} \right) x_w + k_2\varpi_2 h^3 = 0 \end{aligned} \quad (43)$$

$$\begin{aligned} & (k_2\varpi_2 - k_1\varpi_1)x_w^3 + 3k_2\varpi_2 hx_w^2 + \\ & + \left(3k_2\varpi_2 h^2 - \frac{M}{bE\varepsilon_2/k_2} \right) x_w + \\ & + k_2\varpi_2 h^3 - \frac{Mh}{bE\varepsilon_2/k_2} = 0 \end{aligned} \quad (44)$$

In Eqs. (43) and (44) the moments of forces were taken in respect to the axis $0-0$.

In Eqs. (36)-(44), coefficient of the compressive zone $k_i = k_1$, and coefficient of the tensile zone $k_i = k_2$.

An example of drawing up the equations of equilibrium and their use for the calculation of the member strength when the plane sections hypothesis is not applied is presented in the work [16].

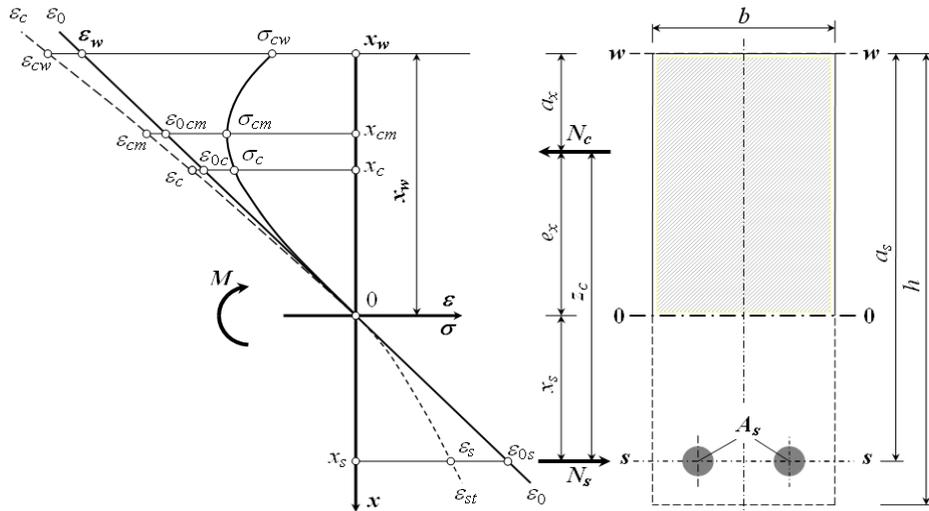


Fig. 3 Cross-section of the member and stress-strain diagrams assumed for calculation

5. Conclusions

1. At present, we still do not have a simple and practical method for calculating stress-strain state parameters at normal sections of members that would rely on

nonlinear stress-strain relations of materials presented by solid curves without replacing them by broken lines comprised of segments of a straight line; and that would take into account the deviations of the strains from the ones defined by the plain sections hypothesis.

2. The paper presents a method for calculating stress-strain state parameters at normal sections when outer forces (bending moment and/or axial force) act on the plane of the cross-section symmetry axis of the member. Material strain diagrams can be linear as well. Using the proposed method and relying on the strains of concrete or reinforcement of compressed or tension zone it is possible to calculate bending moment or longitudinal force. The method is also suitable for making calculations for variously reinforced members of different materials including layered members. With the help of the presented method, any stage of loading can be analyzed.

References

- Židonis, I.** A method of calculation of parameters of stress-strain state in structural components at normal sections.-Modern Building Materials, Structures and Techniques: Abstracts of the 9th international conference held in Vilnius on May 16-18, 2007 (full paper on enclosed CD-ROM, 10 p.).-Vilnius: Technika, 2007, p.366-367.
- Kaklauskas, G., Bačinskas, D., Šimkus R.** Improved strain calculation for reinforced concrete flexural members.-Building Structures: Development and Consolidation. (Proceedings of the conference held in Vilnius on 20 November 1998).-Vilnius: Technika, 1998, p.48-52 (in Lithuanian).
- Dulinskas, E., Zabulionis, D., Balevičius, R.** The equivalence analysis of code STR 2.05.05 and EC2 methods for in bending reinforced concrete elements.-Building Structures: Development of Building Structures in the Light of Integration into the Eurocode Zone. (Proc. of the national conference held in Vilnius on 3 March 2006).-Vilnius: Technika, 2006, p.147-155 (in Lithuanian).
- Raue, E., Timmler, H.-G., Garke, R.** Analysis of pre-damaged and pre-loaded composite cross-sections using mathematical optimisation.-Modern Building Materials, Structures and Techniques: Abstracts of the 9th int. conference held in Vilnius on May 16-18, 2007 (full paper on enclosed CD-ROM, 7 p.). Vilnius: Technika, 2007, p.436-437.
- Eurocode 2: Design of Concrete Structures - Part 1: General Rules and Rules for Buildings. European Committee for Standardization. Pr - EN 1992 - 1, October 2001.-230p.
- STR 2.05.05:2005. Design of Concrete and Reinforced Constructions. -Vilnius: Rekona, 2005. -123p. (in Lithuanian).
- Marčiukaitis, G.** Modern problems and trends of creation and development of building structures.-Building Structures: Development and Consolidation. (Proc. of the conference held in Vilnius on 20 November 1998).-Vilnius: Technika, 1998, p.6-12 (in Lithuanian).
- Kaklauskas, G., Ghaboussi, J.** Stress-strain relations for cracked tensile concrete from RC beam tests.-ASCE J. of Structural Engineering, January 2001, v.127, No1, p.64-73.
- Židonis, I.** A simple-to-integrate formula of stress as function of strain in concrete.-Building Structures: Development of Building Structures in the Light of Integration into the Eurocode Zone. (Proc. of the national conference held in Vilnius on 3 March 2006).-Vilnius: Technika, 2006, p.105-112 (in Lithuanian).
- Zaliesov, A.S., Chistiakov, E.A., Laricheva I.J.** New methods of calculating reinforced concrete members at normal sections based on deformation calculation model.-Concrete and Reinforced Concrete, 5, 1997, p.31-34 (in Russian).
- Raue, E.** Nonlinear analysis of cross-sections by mathematical optimisation.-Bautechnik 82, Heft 11, 2005, p.796-809 (in German).
- Raue, E.** Nonlinear analysis of composite cross-sections by nonlinear optimisation.-Modern Building Materials, Structures and Techniques: Abstracts of the 9th international conference held in Vilnius on May 16-18, 2007 (full paper on enclosed CD-ROM, 9 p.). Vilnius: Technika, 2007, p.434.
- Židonis, I.** Calculation method of stress-strain of reinforced concrete members at normal sections.-Reinforced Constructions: Strength of the Concrete and Reinforced Concrete, 10.-Vilnius, 1980, p.65-72 (in Russian).
- Marčiukaitis, G., Šneideris, A.** On the issue of selecting the methods to evaluate the stress-strain state of flexural reinforced concrete members being in exploration.-Building Structures: Development and Consolidation (Proceedings of the conference held in Vilnius on 20 November 1998).-Vilnius: Technika, 1998, p.43-47 (in Lithuanian).
- Židonis, I., Venckevičius, V.** Simplified variant of easily integratable stress-strain relationship for concrete. -J. of Applied Research. Official journal of Lithuanian Applied Sciences Academy, 2007, No4, p.71-77.
- Židonis, I.** A simple-to-integrate formula of stress as a function of strain in concrete and its description procedure. -Mechanika. -Kaunas: Technologija, 2007, No4(66), p.23-30.

I. Židonis

ALTERNATYVUS METODAS STRYPINIŲ
ELEMENTŲ ĮTEMPIŲ-DEFORMACIJŲ BŪVIUI
NORMALINIUOSE PJŪVIUOSE APSKAIČIUOTI

R e z i u m ė

Pateikiamas gana universalus, vientisas nuoseklus artėjimo (iteracinis) metodas konstrukcinių elementų įtempių-deformacijų būvio parametrą apskaičiuoti pagal medžiagų įtempių diagramas elementų ašiai statmenuose (normaliniuose) pjūviuose be plyšių, ties plyšiu, tarp plyšių, kai lenkimo momentas ir (arba) išilginė jėga veikia elemento skerspjūvio simetrijos ašies plokštumoje. Galima atsižvelgti į medžiagų deformacijų nukrypimą nuo plokščių pjūvių hipotezės, į skirtingas elemento sluoksnių medžiagų charakteristikas. Metodas tinka įvairiai armuotiems įvairių medžiagų, taip pat ir sluoksniuotiems, elementams skaičiuoti. Galima nagrinėti bet kurią apkrovimo stadiją nuo pradžios iki elemento suirimo, net ir elemento stiprumo mažėjimo stadiją. Gali būti imamos ir nekreivinės medžiagų įtempių diagramos.

I. Židonis

ALTERNATIVE METHOD FOR THE CALCULATION OF STRESS-STRAIN STATE PARAMETERS IN NORMAL SECTIONS OF STRUCTURAL MEMBERS

S u m m a r y

The paper presents a rather universal, integral method of sequential approximation (iterative method) for the calculation of parameters of stress-strain state in structural components at normal sections before cracking, at the crack, between the cracks when bending moment and (or) longitudinal force act on the plane of the cross-section symmetry axis of structural components. It is possible to take into account the deviation of the strain of materials from the plane sections hypothesis and different characteristics of the materials of the layers of the member. The method can be also applied for variously reinforced members made of different materials including layered members. Using this method, any stage of loading can be analyzed, even the stage of the weakening of the bearing force of the member. Employing the presented method, it is also possible to use linear stress diagrams of materials.

И. Жидонис

АЛЬТЕРНАТИВНЫЙ МЕТОД РАСЧЕТА ПАРАМЕТРОВ НАПРЯЖЕННО-ДЕФОРМИРОВАННОГО СОСТОЯНИЯ ЭЛЕМЕНТОВ КОНСТРУКЦИЙ ПО НОРМАЛЬНЫМ СЕЧЕНИЯМ

Р е з ю м е

Представляется довольно универсальный и единый (обобщенный) метод последовательных приближений (метод итераций) для вычисления параметров напряженно-деформированного состояния по нормальным сечениям элементов конструкций без трещин, по трещине, между трещинами при криволинейных эпюрах напряжений, когда внешние усилия (изгибающий момент и/или продольная сила) действуют в плоскости оси симметрии сечения элемента. Есть возможность учета отклонений деформаций материалов от гипотезы плоских сечений, учета неодинаковых характеристик материалов слоев элемента. Метод применим для расчета различно армированных элементов из различных материалов, также для слоистых элементов. Можно исследовать любую стадию нагружения от начала до разрушения элемента, даже стадию снижения несущей способности элемента. Могут приниматься и некриволинейные эпюры напряжений материалов.

Received August 31, 2007